

FORM PTO-1390 (Modified) (REV 11-2000)		U.S. DEPARTMENT OF COMMERCE PATENT AND TRADEMARK OFFICE	ATTORNEY'S DOCKET NUMBER 70606-0035
TRANSMITTAL LETTER TO THE UNITED STATES DESIGNATED/ELECTED OFFICE (DO/EO/US) CONCERNING A FILING UNDER 35 U.S.C. 371			U.S. APPLICATION NO. (IF KNOWN, SEE 37 CFR 10/069871)
INTERNATIONAL APPLICATION NO. PCT/KR00/01014	INTERNATIONAL FILING DATE 06 SEPT 2000	PRIORITY DATE CLAIMED 06 SEPT 1999	
TITLE OF INVENTION BOTTLE CAP			
APPLICANT(S) FOR DO/EO/US BAE, Shin-Young			
Applicant herewith submits to the United States Designated/Elected Office (DO/EO/US) the following items and other information:			
<ol style="list-style-type: none"> 1. <input checked="" type="checkbox"/> This is a FIRST submission of items concerning a filing under 35 U.S.C. 371. 2. <input type="checkbox"/> This is a SECOND or SUBSEQUENT submission of items concerning a filing under 35 U.S.C. 371. 3. <input checked="" type="checkbox"/> This is an express request to begin national examination procedures (35 U.S.C. 371(f)). The submission must include items (5), (6), (9) and (24) indicated below. 4. <input type="checkbox"/> The US has been elected by the expiration of 19 months from the priority date (Article 31). 5. <input checked="" type="checkbox"/> A copy of the International Application as filed (35 U.S.C. 371 (c) (2)) <ol style="list-style-type: none"> a. <input checked="" type="checkbox"/> is attached hereto (required only if not communicated by the International Bureau). b. <input type="checkbox"/> has been communicated by the International Bureau. c. <input type="checkbox"/> is not required, as the application was filed in the United States Receiving Office (RO/US). 6. <input type="checkbox"/> An English language translation of the International Application as filed (35 U.S.C. 371(c)(2)). <ol style="list-style-type: none"> a. <input type="checkbox"/> is attached hereto. b. <input type="checkbox"/> has been previously submitted under 35 U.S.C. 154(d)(4). 7. <input type="checkbox"/> Amendments to the claims of the International Application under PCT Article 19 (35 U.S.C. 371 (c)(3)) <ol style="list-style-type: none"> a. <input type="checkbox"/> are attached hereto (required only if not communicated by the International Bureau). b. <input type="checkbox"/> have been communicated by the International Bureau. c. <input type="checkbox"/> have not been made; however, the time limit for making such amendments has NOT expired. d. <input type="checkbox"/> have not been made and will not be made. 8. <input type="checkbox"/> An English language translation of the amendments to the claims under PCT Article 19 (35 U.S.C. 371(c)(3)). 9. <input type="checkbox"/> An oath or declaration of the inventor(s) (35 U.S.C. 371 (c)(4)). 10. <input type="checkbox"/> An English language translation of the annexes to the International Preliminary Examination Report under PCT Article 36 (35 U.S.C. 371 (c)(5)). 11. <input checked="" type="checkbox"/> A copy of the International Preliminary Examination Report (PCT/IPEA/409). 12. <input checked="" type="checkbox"/> A copy of the International Search Report (PCT/ISA/210). <p>Items 13 to 20 below concern document(s) or information included:</p> <ol style="list-style-type: none"> 13. <input checked="" type="checkbox"/> An Information Disclosure Statement under 37 CFR 1.97 and 1.98. 14. <input type="checkbox"/> An assignment document for recording. A separate cover sheet in compliance with 37 CFR 3.28 and 3.31 is included. 15. <input type="checkbox"/> A FIRST preliminary amendment. 16. <input type="checkbox"/> A SECOND or SUBSEQUENT preliminary amendment. 17. <input type="checkbox"/> A substitute specification. 18. <input type="checkbox"/> A change of power of attorney and/or address letter. 19. <input type="checkbox"/> A computer-readable form of the sequence listing in accordance with PCT Rule 13ter.2 and 35 U.S.C. 1.821 - 1.825. 20. <input type="checkbox"/> A second copy of the published international application under 35 U.S.C. 154(d)(4). 21. <input type="checkbox"/> A second copy of the English language translation of the international application under 35 U.S.C. 154(d)(4). 22. <input type="checkbox"/> Certificate of Mailing by Express Mail 23. <input checked="" type="checkbox"/> Other items or information: 			

U.S. APPLICATION NO. (IF KNOWN, SEE 37 CFR 1.53(b)(2)) <div style="font-size: 2em; font-weight: bold; margin-top: 5px;">10/09871</div>	INTERNATIONAL APPLICATION NO. <div style="font-weight: bold; margin-top: 5px;">PCT/KR00/01014</div>	ATTORNEY'S DOCKET NUMBER <div style="font-weight: bold; margin-top: 5px;">70606-0035</div>						
24. The following fees are submitted: BASIC NATIONAL FEE (37 CFR 1.492 (a) (1) - (5)) : <input checked="" type="checkbox"/> Neither international preliminary examination fee (37 CFR 1.482) nor international search fee (37 CFR 1.445(a)(2)) paid to USPTO and International Search Report not prepared by the EPO or JPO \$1040.00 <input type="checkbox"/> International preliminary examination fee (37 CFR 1.482) not paid to USPTO but International Search Report prepared by the EPO or JPO \$890.00 <input type="checkbox"/> International preliminary examination fee (37 CFR 1.482) not paid to USPTO but international search fee (37 CFR 1.445(a)(2)) paid to USPTO \$740.00 <input type="checkbox"/> International preliminary examination fee (37 CFR 1.482) paid to USPTO but all claims did not satisfy provisions of PCT Article 33(1)-(4) \$710.00 <input type="checkbox"/> International preliminary examination fee (37 CFR 1.482) paid to USPTO and all claims satisfied provisions of PCT Article 33(1)-(4) \$100.00 <div style="text-align: right; margin-top: 5px;">ENTER APPROPRIATE BASIC FEE AMOUNT =</div>		CALCULATIONS PTO USE ONLY <table border="1" style="width:100%; border-collapse: collapse;"> <tr> <td style="width:50%; height: 40px;"></td> <td style="width:50%;"></td> </tr> <tr> <td style="text-align: right;">\$1,040.00</td> <td></td> </tr> <tr> <td style="text-align: right;">\$0.00</td> <td></td> </tr> </table>			\$1,040.00		\$0.00	
\$1,040.00								
\$0.00								
Surcharge of \$130.00 for furnishing the oath or declaration later than <input type="checkbox"/> 20 <input type="checkbox"/> 30 months from the earliest claimed priority date (37 CFR 1.492 (e)).		<table border="1" style="width:100%; border-collapse: collapse;"> <tr> <td style="width:50%;"></td> <td style="width:50%;"></td> </tr> <tr> <td style="text-align: right;">\$0.00</td> <td></td> </tr> </table>			\$0.00			
\$0.00								
CLAIMS	NUMBER FILED	NUMBER EXTRA	RATE					
Total claims	4 - 20 =	0	x \$18.00	\$0.00				
Independent claims	1 - 3 =	0	x \$84.00	\$0.00				
Multiple Dependent Claims (check if applicable). <input type="checkbox"/>				\$0.00				
TOTAL OF ABOVE CALCULATIONS =				\$1,040.00				
<input type="checkbox"/> Applicant claims small entity status. See 37 CFR 1.27. The fees indicated above are reduced by 1/2.				\$0.00				
SUBTOTAL =				\$1,040.00				
Processing fee of \$130.00 for furnishing the English translation later than <input type="checkbox"/> 20 <input type="checkbox"/> 30 months from the earliest claimed priority date (37 CFR 1.492 (f)).				\$0.00				
TOTAL NATIONAL FEE =				\$1,040.00				
Fee for recording the enclosed assignment (37 CFR 1.21(h)). The assignment must be accompanied by an appropriate cover sheet (37 CFR 3.28, 3.31) (check if applicable). <input type="checkbox"/>				\$0.00				
TOTAL FEES ENCLOSED =				\$1,040.00				
				Amount to be: refunded \$				
				charged \$				
a. <input checked="" type="checkbox"/> A check in the amount of <u>1,040.00</u> to cover the above fees is enclosed. b. <input type="checkbox"/> Please charge my Deposit Account No. _____ in the amount of _____ to cover the above fees. A duplicate copy of this sheet is enclosed. c. <input checked="" type="checkbox"/> The Commissioner is hereby authorized to charge any additional fees which may be required, or credit any overpayment to Deposit Account No. <u>04-1061</u> A duplicate copy of this sheet is enclosed. d. <input type="checkbox"/> Fees are to be charged to a credit card. WARNING: Information on this form may become public. Credit card information should not be included on this form. Provide credit card information and authorization on PTO-2038.								
NOTE: Where an appropriate time limit under 37 CFR 1.494 or 1.495 has not been met, a petition to revive (37 CFR 1.137(a) or (b)) must be filed and granted to restore the application to pending status.								
SEND ALL CORRESPONDENCE TO:								
<div style="border: 1px solid black; padding: 5px;"> DICKINSON WRIGHT PLLC 1901 L. St., Suite 800 Washington, DC 20036 </div>								
<div style="border: 1px solid black; padding: 5px;"> <div style="text-align: center;"> SIGNATURE </div> <div style="text-align: center; margin-top: 10px;"> J. John Shimazaki NAME </div> <div style="text-align: center; margin-top: 10px;"> 37,236 REGISTRATION NUMBER </div> <div style="text-align: center; margin-top: 10px;"> 1 MARCH 2002 DATE </div> </div>								

BOTTLE CAP

Technical Field

The present invention relates to a bottle cap, and more particularly, to a bottle
5 cap configured such that consumers can easily identify the opening or closing of a cap
openably installed on the mouth of a liquor bottle, thereby enhancing the reliability and
product value of liquors.

Background Art

10 In general, existing caps for use in liquor bottles are openably configured just
by opening or closing the mouth of a liquor bottle. Also, in order to verify that the
liquor bottle has never been unsealed, coating paper, e.g., vinyl, or a label has been
applied to the outer surface of the liquor bottle cap.

However, a problem associated with the conventional liquor bottle caps is that
15 liquors contained in unsealed bottles may be deceptively sold to consumers. In other
words, even if the liquor contained in a liquor bottle capped with a bottle cap that has
been fraudulently opened is deceptively sold to consumers, the consumers cannot
perceive that the liquor has been tampered with, which deteriorates the reliability and
product value of the liquor.

20 As described above, since consumers cannot easily identify the opening or
closing of a liquor bottle cap, they may often deceptively drink fraudulently bottled
liquors at a bar or pub.

Disclosure of the Invention

To solve the above problems, it is an object of the present invention to provide a bottle cap having a portion of displaying whether it has been opened or not, printed on the interior part of the bottle cap, the displaying portion being visible when the bottle cap is opened for the first time, thereby easily identifying whether the bottle cap has been opened or not.

To accomplish the above object of the present invention, there is provided a bottle cap for a bottle which holds contents, including a cap body having an inner cap coupled so as to open or close the mouth of the bottle, and an outer cap made to rotate in a circumferential direction only and fixedly coupled to the inner cap so as not to deviate from the inner cap, ratcheting means having first and second teeth formed at facing portions of the inner and outer circumferential surfaces of the inner and outer caps and engaged to be movable unidirectionally, and first and second protrusions spaced apart from the ratcheting teeth and protruding from the facing portions of the inner and outer caps, for integrally rotating the inner and outer caps from the mouth of the bottle such that the first and second ratcheting protrusions are engaged with each other when the second ratcheting teeth move relative to the first ratcheting teeth by stages, and opening/closing identification means having a portion of displaying whether the cap body has been opened or not, printed on the top surface of the inner cap, and an identification means formed on the top surface of the outer cap, for identifying from the outside whether the cap body has been opened or not, according to movement of the second ratcheting teeth relative to the first ratcheting teeth.

The inner and outer caps may be integrally connected by fixed protrusions and

grooves formed at facing portions of inner and outer circumferential surfaces thereof.

The identification means may include convex portions for covering a display portion and concave portions for uncovering a display portion, the convex and concave portions formed along the periphery of an opening hole opened by perforating a portion
5 of the top surface of the outer cap, at the same pitch with the ratcheting teeth.

The identification means may be configured such that holes are formed on a portion of the top surface of the outer cap at the same pitch with the ratcheting teeth to uncover the display portion therethrough.

10 Brief Description of the Drawings

The above object and advantages of the present invention will become more apparent by describing in detail a preferred embodiment thereof with reference to the attached drawings in which:

FIG. 1 is a cross-sectional view illustrating the state in which a bottle cap
15 according to the present invention is mounted;

FIG. 2 is an enlarged view of a portion "A" of FIG. 1;

FIG. 3 is a front view of an inner cap of the bottle cap according to the present invention;

FIG. 4 illustrates the state of the bottle cap according to the present invention
20 before it is opened from the mouth of a bottle;

FIG. 5 is an enlarged view of a portion "B" of FIG. 4;

FIG. 6 illustrates the state of the bottle cap according to the present invention after it is opened from the mouth of a bottle;

FIG. 7 is an enlarged view of a portion "C" of FIG. 6;

FIG. 8 is a plan view of the bottle cap according to the present invention before it is opened from the mouth of a bottle;

FIG. 9 is a plan view of the bottle cap according to the present invention after
5 it is opened from the mouth of a bottle; and

FIG. 10 is a plan view illustrating another embodiment of an identification means for identifying whether the bottle cap according to the present invention has been opened or not.

10 Best mode for carrying out the Invention

The present invention will now be described in detail with reference to the accompanying drawings.

FIG. 1 is a cross-sectional view illustrating the state in which a bottle cap according to the present invention is mounted, and FIG. 2 is an enlarged view of a
15 portion "A" of FIG. 1.

As shown in FIG. 1, a bottle cap 10 according to the present invention includes a cap body. The cap body includes an inner cap 12 coupled so as to open or close the mouth of a bottle 1, and an outer cap 14 fixedly coupled to the inner cap 12 so as to rotate in a circumferential direction only.

20 The inner cap 12 and the outer cap 14 are integrally connected by means of fixed protrusions 16 and grooves 18, as shown in FIG. 2, so that they are not separated once connected.

As shown, the bottle cap 10 according to the present invention includes an

opening/closing identification means of a cap body. The identification means is configured such that an opening/closing display portion 28 on which characters are printed is fixedly connected to the top surface of the inner cap 12 and an opening hole 30 is formed on the top surface of the outer cap 14 so as to identify whether the bottle cap 10 is opened or closed by covering or uncovering the display portion 28. The opening hole 30 will later be described in more detail with reference to FIGS. 8 and 9.

FIG. 3 is a front view of an inner cap of a bottle cap according to the present invention.

As shown in FIG. 3, first ratcheting teeth 20 are provided in the inner cap 12. The first ratcheting teeth 20, provided for preventing reverse rotation, are shaped of ratchets, and will now be described in detail with reference to FIGS. 4 through 7.

FIG. 4 illustrates the state of the bottle cap according to the present invention before it is opened from the mouth of a bottle, FIG. 5 is an enlarged view of a portion "B" of FIG. 4, FIG. 6 illustrates the state of the bottle cap according to the present invention after it is opened from the mouth of a bottle, and FIG. 7 is an enlarged view of a portion "C" of FIG. 6.

As shown in FIGS. 4 through 7, the bottle cap 10 according to the present invention includes ratcheting means. The ratcheting means includes first and second teeth 20 and 22 formed at facing portions of the outer circumferential surface of the inner cap 12 and the inner circumferential surface of the outer cap 14 and engaged so as to be movable unidirectionally. The first and second teeth 20 and 22 are formed so as to slope unidirectionally, thereby preventing reverse rotation.

If the first teeth 20 are formed on the outer circumferential surface of the inner

cap 12, the second teeth 22 are then formed on the inner circumferential surface of the outer cap 14. In such a manner, the first and second teeth 20 and 22 are engaged with each other. The teeth formed on the outer circumferential surface of the inner cap 12 are formed so as to have a tension.

5 Also, first and second ratcheting protrusions 24 and 26 are spaced apart from the ratcheting teeth and protrude from the facing portions of the inner and outer caps 12 and 14. If the first ratcheting protrusions 24 are formed on the outer circumferential surface of the inner cap 12, the second ratcheting protrusions 26 are then formed on the inner circumferential surface of the outer cap 14.

10 As shown, two ratcheting means are symmetrically installed at positions where the cap body is divided into two parts. However, four ratcheting means may be symmetrically installed at positions where the cap body is divided into four parts.

As shown in FIGS. 4 and 5, before the bottle cap 10 is opened, the first and second ratcheting teeth 20 and 22 are engaged with each other, and the first and second
15 ratcheting protrusions 24 and 26 are spaced a predetermined distance (d) apart from each other.

In such a state, if the outer cap 14 is rotated for the purpose of opening the bottle cap 10, the first and second ratcheting teeth 20 and 22 move by stages so that only the outer cap 14 rotates at a predetermined angle during an initial stage. In other
20 words, while the ratcheting teeth 22 (or 20) formed on the inner cap 12 are subjected to a tension by the ratcheting teeth 20 (or 22) formed on the outer cap 14, they are pressed inwardly and then restored into their original positions, thereby moving by stages.

The rotation angle of the outer cap 14 is preferably 20° , more preferably 10° . The rotation angle of the outer cap 14 is determined by the lengths of the ratcheting teeth.

As described above, if only the outer cap 14 is rotated by a predetermined angle, as shown in FIGS. 6 and 7, the first and second ratcheting protrusions 24 and 26 are engaged with each other, so that the inner cap 12 is rotated accordingly. On and after this time, the inner and outer caps 12 and 14 are rotated together all the time.

If the bottle cap 10 is opened in such a manner, the opening or closing thereof can be easily identified by the identification means, which will be described with reference to FIGS. 8 and 9.

FIG. 8 is a plan view of the bottle cap according to the present invention before it is opened from the mouth of a bottle, and FIG. 9 is a plan view of the bottle cap according to the present invention after it is opened from the mouth of a bottle.

As shown in FIGS. 8 and 9, the bottle cap 10 according to the present invention includes an opening/closing identification means. The identification means includes an opening hole 30 opened by perforating a portion of the top surface of the outer cap 14, convex portions 32 for covering a display portion and concave portions 34 for uncovering a display portion, the convex and concave portions 32 and 34 formed along the periphery of the opening hole 30 at the same pitch with the ratcheting teeth. The convex portions 32 and the concave portions 34 may be either opaque or transparent.

FIG. 8 illustrates the state in which characters printed on the display portion 28 (see FIG. 1) fixedly coupled to the top surface of the inner cap 12 is covered by the

convex portions 32 formed along the periphery of the opening hole 30, representing that the bottle cap 10 is not opened.

FIG. 9 illustrates the state in which characters printed on the display portion 28 (see FIG. 1) fixedly coupled to the top surface of the inner cap 12 is visible through the concave portions 34 formed along the periphery of the opening hole 30, representing that the bottle cap 10 is opened. In FIG. 8, the characters visible through the concave portions 34 are **OPEN**, but are not limited thereto.

FIG. 10 is a plan view illustrating another embodiment of the opening/closing identification means of the bottle cap according to the present invention.

As shown in FIG. 10, the opening/closing identification means of the cap body includes holes 36 formed on a portion of the top surface of the outer cap 14 at the same pitch with the ratcheting teeth, thereby identifying whether the bottle cap 10 is opened or closed such that the display portion 28 is visible through the holes 36 when the outer cap 14 is rotated by a predetermined angle. All the components other than the identification means are the same as those of the above-described embodiment.

Also, it is possible to prevent foreign matter such as dust from being induced by installing transparent glass on the holes 36. Further, characters printed on the display portion 28 can be more clearly identified by installing reading glasses or magnifying glasses using convex lenses.

Industrial Applicability

As described above, according to the bottle cap of the present invention, an outer cap and an inner cap are made to race by a predetermined angle only when the

bottle cap is opened for the first time, and characters printed on a display portion are visible so as to easily identify the opening or closing of the bottle cap, thereby enhancing the reliability and product value of contents contained in the bottle. The bottle caps according to the present invention can be most effectively applied to liquor
5 bottles.

10069671-052900

What is claimed is:

1. A bottle cap for a bottle which holds contents, comprising:

a cap body having an inner cap coupled so as to open or close the mouth of the bottle, and an outer cap made to rotate in a circumferential direction only and fixedly coupled to the inner cap so as not to deviate from the inner cap;

ratcheting means having first and second teeth formed at facing portions of the inner and outer circumferential surfaces of the inner and outer caps and engaged to be movable unidirectionally, and first and second protrusions spaced apart from the ratcheting teeth and protruding from the facing portions of the inner and outer caps, for integrally rotating the inner and outer caps from the mouth of the bottle such that the first and second ratcheting protrusions are engaged with each other when the second ratcheting teeth move relative to the first ratcheting teeth by stages; and

opening/closing identification means having a portion of displaying whether the cap body has been opened or not, printed on the top surface of the inner cap, and an identification means formed on the top surface of the outer cap, for identifying from the outside whether the cap body has been opened or not according to movement of the second ratcheting teeth relative to the first ratcheting teeth.

2. The bottle cap according to claim 1, wherein the inner and outer caps are integrally connected by fixed protrusions and grooves formed at facing portions of inner and outer circumferential surfaces thereof.

3. The bottle cap according to claim 1, wherein the identification means

includes convex portions for covering a display portion and concave portions for uncovering a display portion, the convex and concave portions formed along the periphery of an opening hole opened by perforating a portion of the top surface of the outer cap, at the same pitch with the ratcheting teeth.

5

4. The bottle cap according to claim 1, wherein the identification means is configured such that holes are formed on a portion of the top surface of the outer cap at the same pitch with the ratcheting teeth to uncover the display portion therethrough.

10

(19) World Intellectual Property Organization
International Bureau




(43) International Publication Date
15 March 2001 (15.03.2001)

PCT

(10) International Publication Number
WO 01/17871 A1

- (51) International Patent Classification⁷: B65D 41/00 (74) Agent: KIM, Young-Hwa; RM 101, Hwain Bldg., 824-29 Yeoksam-dong, Kangnam-ku, Seoul 135-080 (KR).
- (21) International Application Number: PCT/KR00/01014 (81) Designated States (*national*): AE, AG, AL, AM, AT, AU, AZ, BA, BB, BG, BR, BY, BZ, CA, CH, CN, CR, CU, CZ, DE, DK, DM, DZ, EE, ES, FI, GB, GD, GE, GH, GM, HR, HU, ID, IL, IN, IS, JP, KE, KG, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MA, MD, MG, MK, MN, MW, MX, MZ, NO, NZ, PL, PT, RO, RU, SD, SE, SG, SI, SK, SL, TJ, TM, TR, TT, TZ, UA, UG, US, UZ, VN, YU, ZA, ZW.
- (22) International Filing Date: 6 September 2000 (06.09.2000)
- (25) Filing Language: English
- (26) Publication Language: English
- (30) Priority Data: 1999/0018866 U 6 September 1999 (06.09.1999) KR
- (71) Applicant (*for all designated States except US*): IPLAS-TIC CO., LTD. [KR/KR]; 79-74 2F, Sanbon-Dong, Kunpo-Si, Kyoungki-do 435-040 (KR).
- (72) Inventor; and
- (75) Inventor/Applicant (*for US only*): BAE, Shin-Young [KR/KR]; 79-74 2F, Sanbon-Dong, Kunpo-Si, Kyoungki-do 435-040 (KR).
- (84) Designated States (*regional*): ARIPO patent (GH, GM, KE, LS, MW, MZ, SD, SL, SZ, TZ, UG, ZW), Eurasian patent (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European patent (AT, BE, CH, CY, DE, DK, ES, FI, FR, GB, GR, IE, IT, LU, MC, NL, PT, SE), OAPI patent (BF, BJ, CF, CG, CI, CM, GA, GN, GW, ML, MR, NE, SN, TD, TG).
- Published:
— With international search report.
- For two-letter codes and other abbreviations, refer to the "Guidance Notes on Codes and Abbreviations" appearing at the beginning of each regular issue of the PCT Gazette.*

(54) Title: BOTTLE CAP

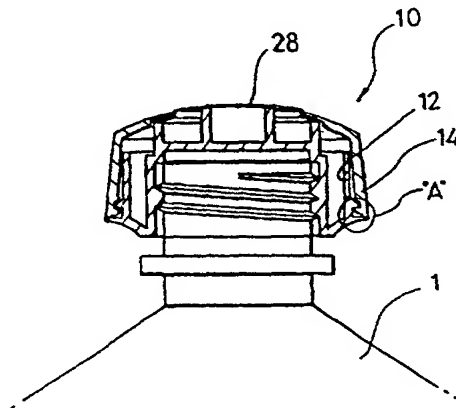


(57) Abstract: There is provided a bottle cap configured such that consumers can easily identify the opening or closing of a cap openably installed on the mouth of a liquor bottle. The bottle cap for a bottle which holds contents, includes a cap body having an inner cap coupled so as to open or close the mouth of the bottle, and an outer cap made to rotate in a circumferential direction only and fixedly coupled to the inner cap so as not to deviate from the inner cap, ratcheting means having first and second teeth formed at facing portions of the inner and outer circumferential surfaces of the inner and outer caps and engaged to be movable unidirectionally, and first and second protrusions spaced apart from the ratcheting teeth and protruding from the facing portions of the inner and outer caps, for integrally rotating the inner and outer caps from the mouth of the bottle such that the first and second ratcheting protrusions are engaged with each other when the second ratcheting teeth move relative to the first ratcheting teeth by stages, and opening/closing identification means having a portion of displaying whether the cap body has been opened or not, printed on the top surface of the inner cap, and an identification means formed on the top surface of the outer cap, for identifying from the outside whether the cap body has been opened or not, according to movement of the second ratcheting teeth relative to the first ratcheting teeth.



WO 01/17871 A1



1/6

FIG. 1

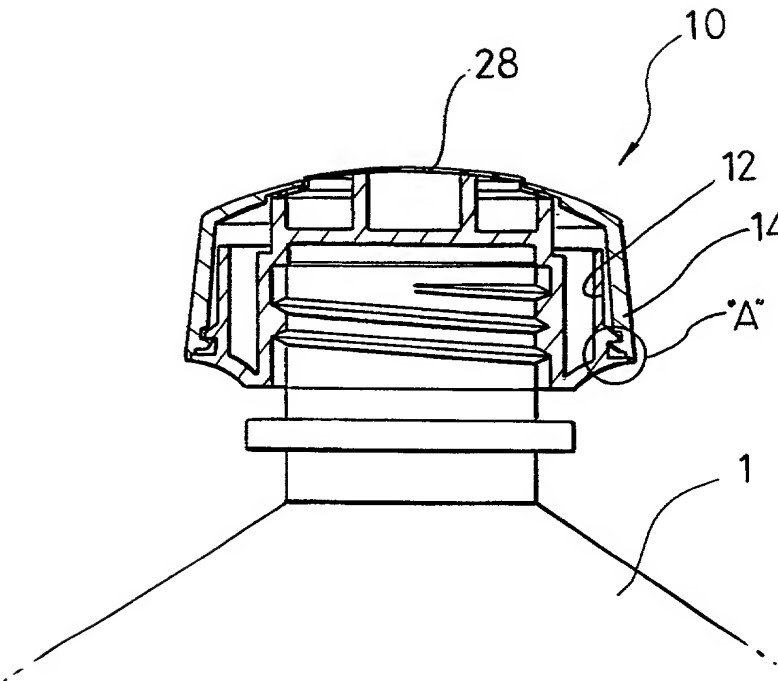

2/6

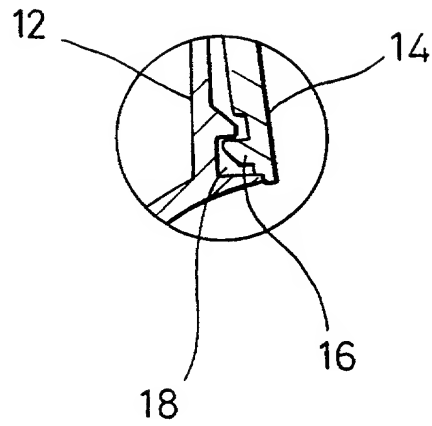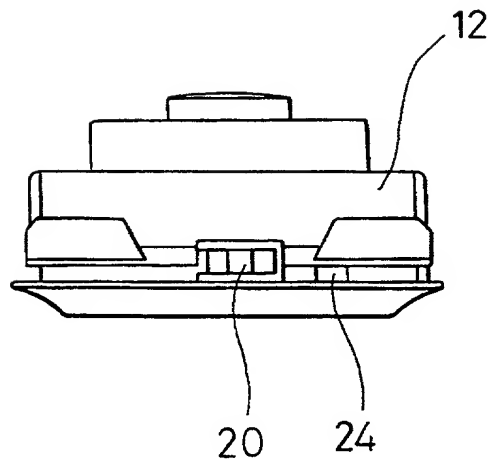FIG. 2**FIG. 3**

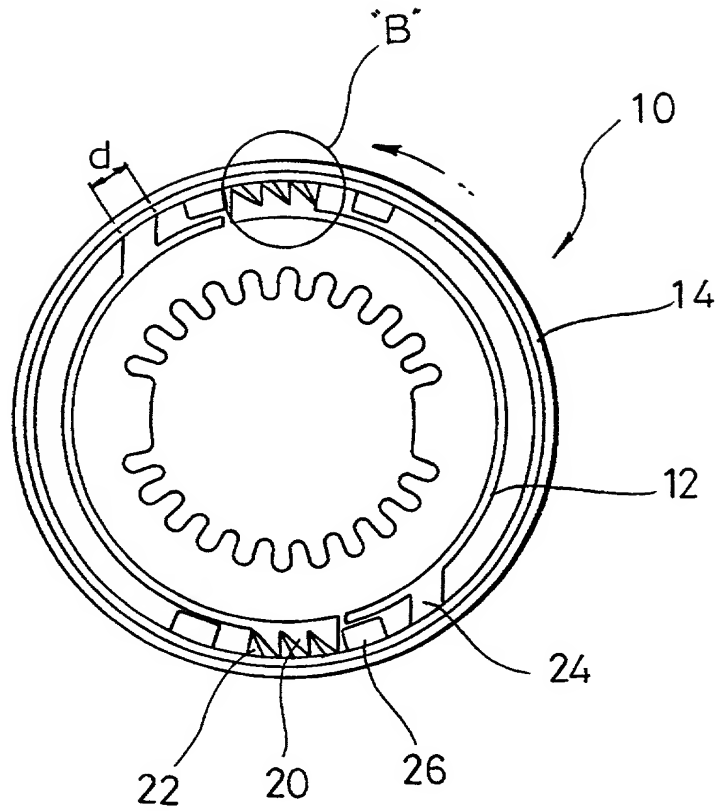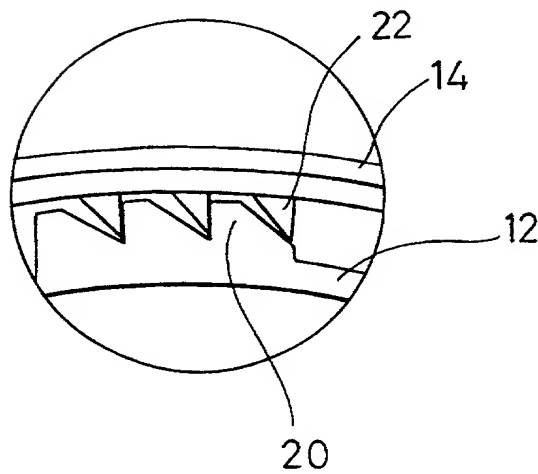3/6
FIG. 4**FIG. 5**

4/6

FIG. 6


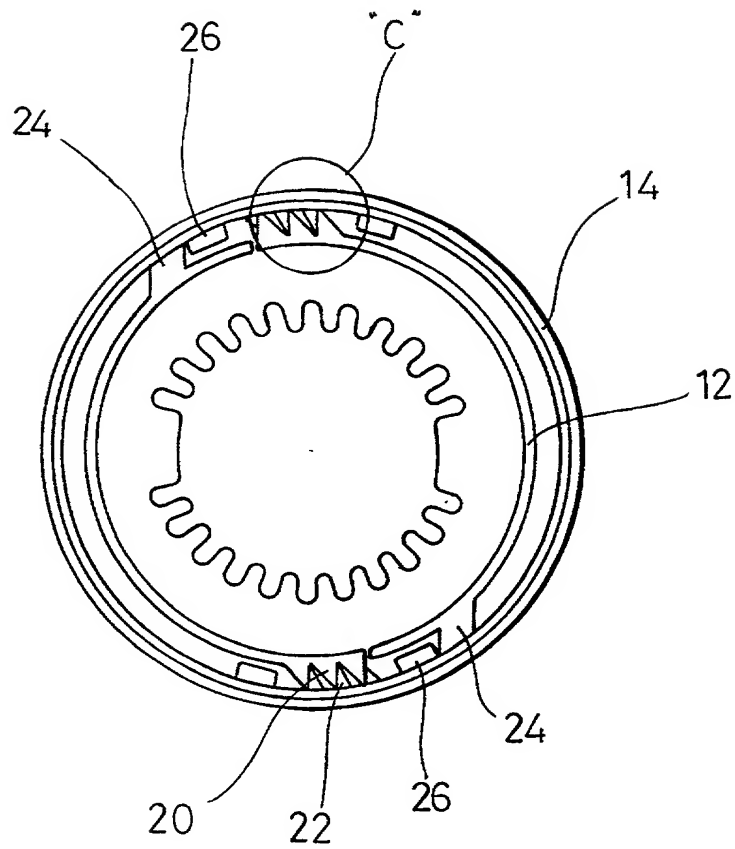


FIG. 7

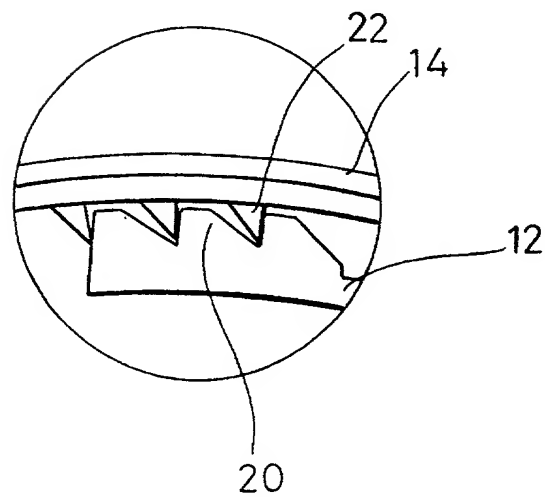

5/6

FIG.8



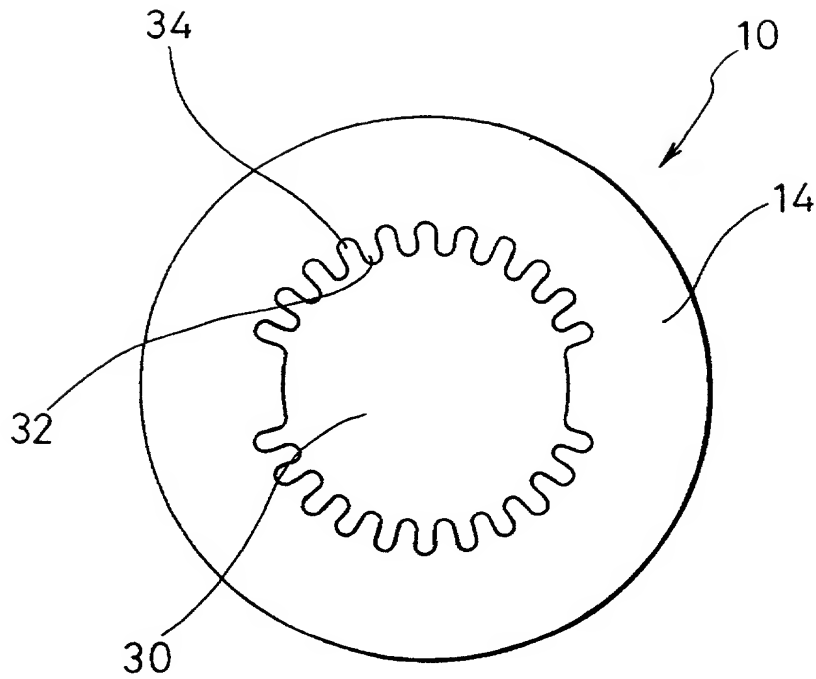


FIG.9

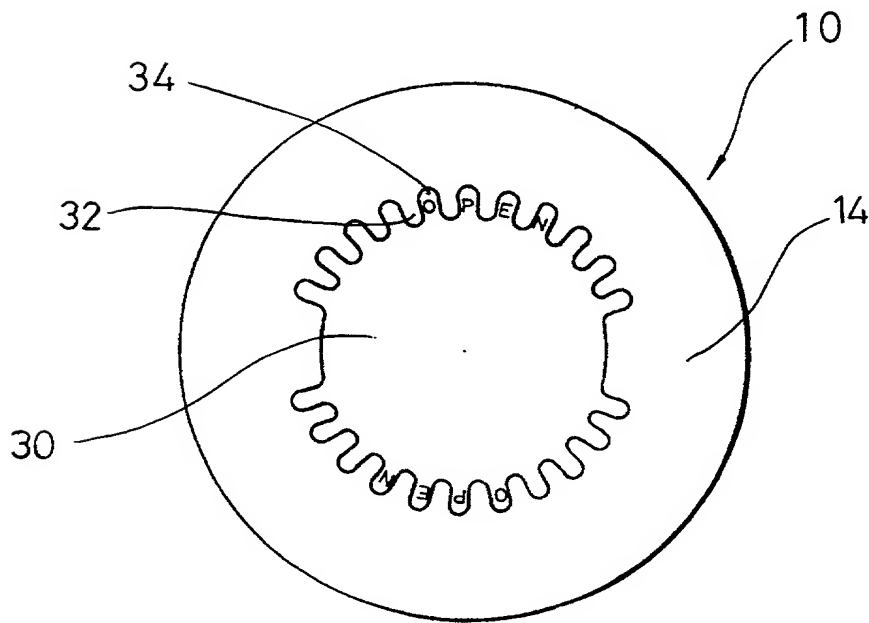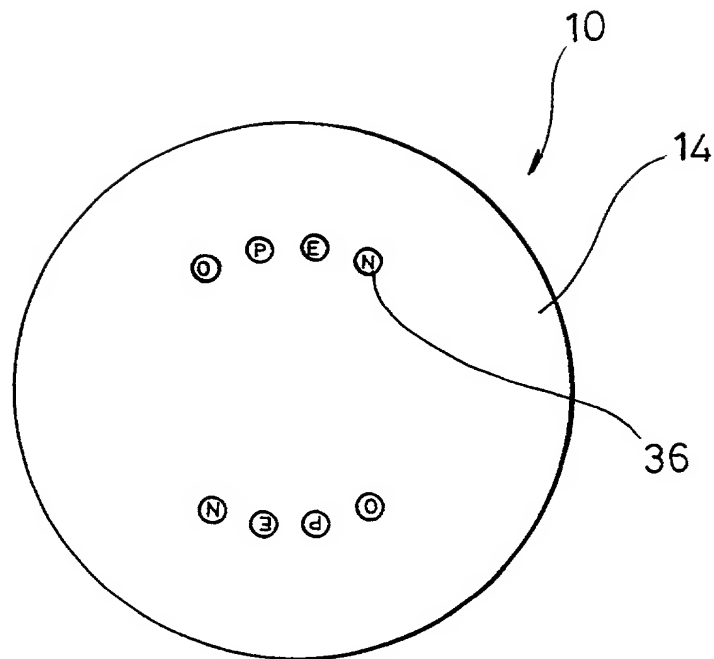

6 / 6

FIG.10

DECLARATION AND POWER OF ATTORNEY

As a below named inventor, I declare that:

My residence, post office address, and citizenship are as stated below next to my name. I believe that I am the original, first and sole inventor (if only one name is listed below) or an original, first, and joint inventor (if plural names are listed below) of the subject matter that is claimed and for which a patent is sought on the invention entitled

BOTTLE CAP

X the specification of which is attached hereto.
 was filed on _____ as patent application Serial No. _____, and (if applicable) was amended on _____.

I hereby state that I have reviewed and understand the contents of the above identified specification, including the claims, as amended by any amendment referred to above.

I acknowledge the duty to disclose information of which I am aware and which is material to the examination of the patent application in accordance with 37 CFR §1.56. This application is entitled to small entity status.

I hereby claim foreign priority benefits under 35 U.S.C. §119(a)-(d) or §365(b) of any foreign application(s) for patent or inventor's certificate, or §365(a) of any PCT International application which designates at least one country other than the United States, listed below and have also identified below, by checking the space, any foreign application for patent or inventor's certificate, or PCT International application having a filing date before that of the application on which priority is not claimed.

Prior Foreign Application(s)

Number	Country	Day/Month/Year Filed	Priority Not Claimed
1999-0018866	Korea	September 6, 1999	

I hereby claim the benefit under 35 U.S.C. §119(e) of any United States provisional application(s) listed below.

Application Serial Number

Filing Date

I hereby claim the benefit under 35 U.S.C. §120 of any United States application(s), or §365(c) of any PCT International application designating the United States, listed below and, insofar as the subject matter of each of the claims of this application is not disclosed in the prior United States or PCT International application in the manner provided by the first paragraph of 35 U.S.C. §112, I acknowledge the duty to disclose information known to me which is material to the patentability as defined in 37 CFR §1.56 which became available between the filing date of the prior application and the national or PCT international filing date of this application.

Application Serial Number	Filing Date	Status (patented, pending, abandoned)
PCT/KR00/01014	September 6, 2000	Pending

Each undersigned applicant hereby appoints J. John Shimazaki (Registration No. 37,236), Douglas A. Mullen (Registration No. 38,569), Rick Jones (Registration No. 39,242) and Eric Doyle (Registration No. 42,496) as his attorneys with full power of substitution to prosecute the subject application and to transact all business in the Patent and Trademark Office connected therewith.

Send Correspondence to: DICKINSON WRIGHT PLLC, 1901 L Street, N.W., Suite 800, Washington, D.C. 20036, Phone (202) 457-0160.

I hereby declare that all statements made herein of my own knowledge are true and that all statement made on information and belief are believed to be true; and further that these statements were made with the knowledge that willful false statements and the like so made are punishable by fine or imprisonment, or both, under Section 1001 of Title 18 of the United States Code and that such willful false statements may jeopardize the validity of the application or any patent issued thereon.

Full name of sole or first inventor: BAE, Shin-Young

Inventor's signature: BAE Shin Young Date: March 11, 2002
 Residence: 79-74 2F, Sanbon-dong, Kunpo-Si, Kyougki-do 435-040, Republic of Korea
 Citizenship: Republic of Korea
 Post Office Address: same as residence

Full name of second joint inventor: _____

Inventor's signature: _____ Date: _____
 Residence: _____
 Citizenship: _____
 Post Office Address: _____